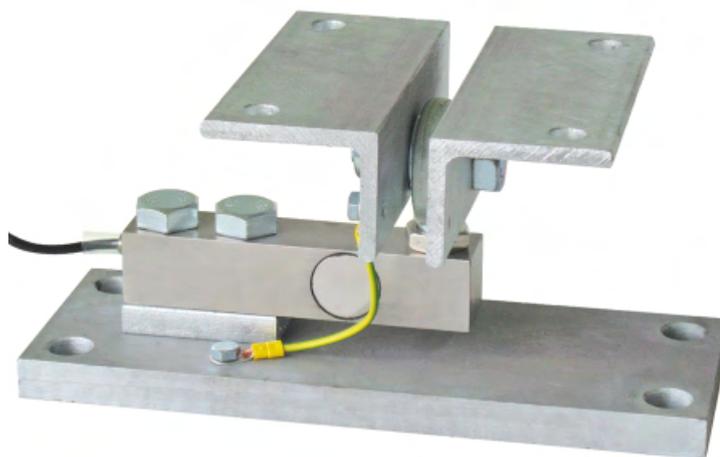


**Series load cells:            FTP - FTZ - FTK****Up to 10000 kg application range**

MAX STATIC LOAD    kg	FOR LOAD CELLS	NET WEIGHT (kg)	CODE
<b>5000</b>	FTK - FTP - FTZ (3000 - 5000 kg)	10.5	PS
<b>10000</b>	FTP	15.5	PS10T

*Load cell not included.*

## DESCRIPTION

- Upper plate, lower plate and hot galvanized steel block.
- Constraint against lateral forces and anti-tilt by ball-and-socket joint.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.

### DIMENSIONS AND TECHNICAL SPECIFICATIONS

- Interconnect the plates to the earthing.
- In case of structure with four-point support, proceed to the height adjustment, if one-point does not touch the upper part of the mounting kit.

