


Series load cells: **FCAL - FCAX**

Up to 1500 kg application range

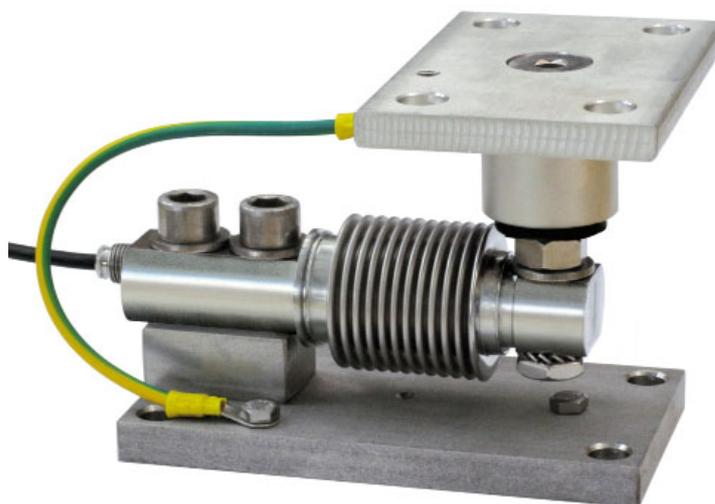

MAX STATIC LOAD kg	FOR LOAD CELLS	NET WEIGHT (kg)	CODE
<b>500</b>	FCAL - FCAX	2.3	TFGP
<b>1500</b>	FCAL - FCAX	2.3	TFGP2000


*Load cell not included.*

### DESCRIPTION


- Upper plate with a compression joint in AISI 304 stainless steel and rubber.
- Lower plate and block in AISI 304 stainless steel.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.
- Locking screw to avoid damage during transport and installation.

### DIMENSIONS AND TECHNICAL SPECIFICATIONS


- During the transport and installation the lock (\*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the lower plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts.

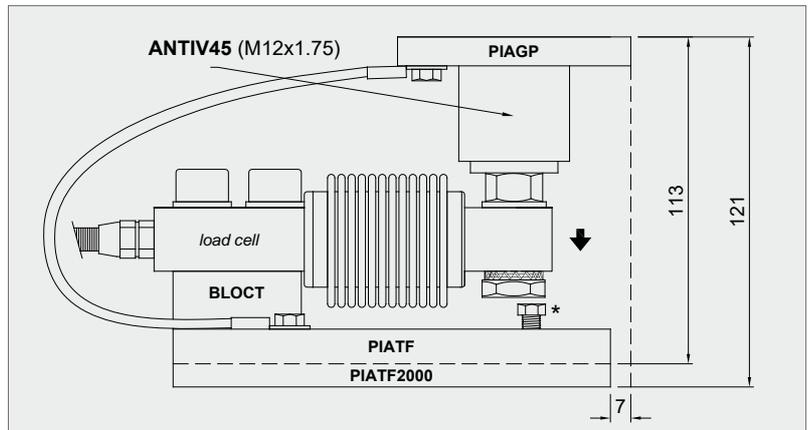


**PIATF**

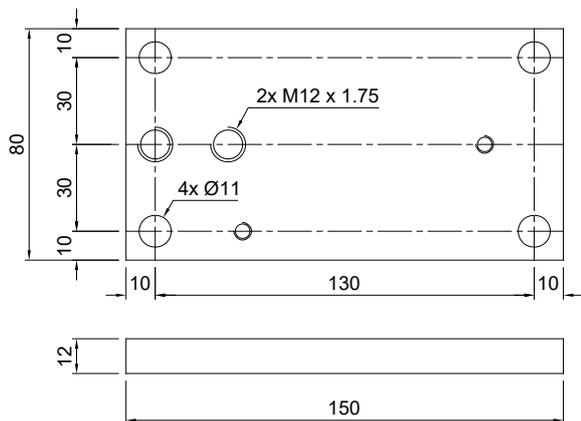


**PIAGP**

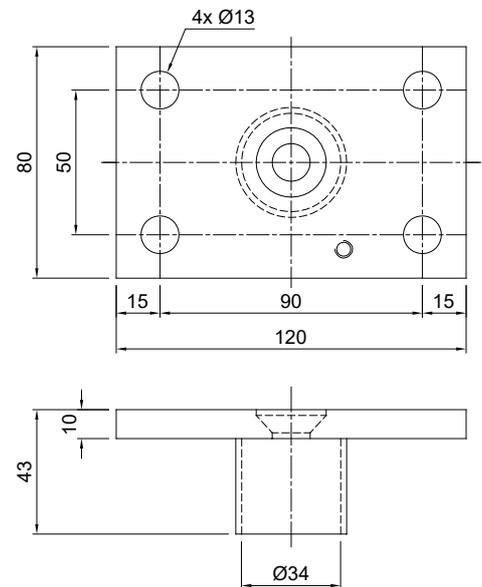


**PIATF2000**

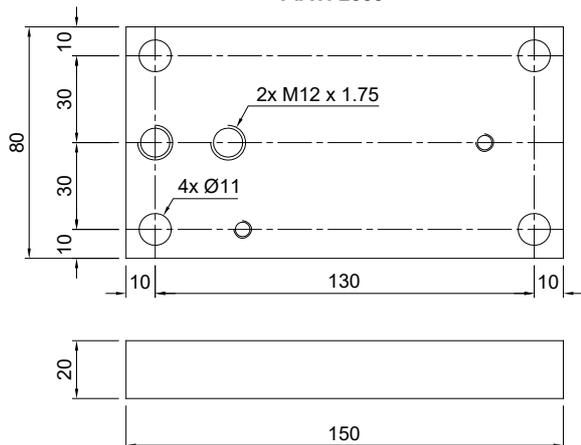


**BLOCT**

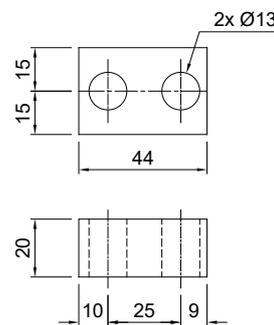

**ANTIV45**

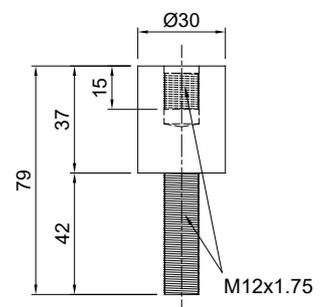

**FIXING TO THE WEIGHED STRUCTURE**

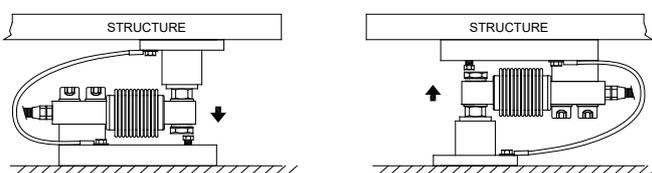

**POSSIBLE UPPER PLATE POSITIONS**

