



Series load cells: **FCAL - FCAX**

Up to 1500 kg application range

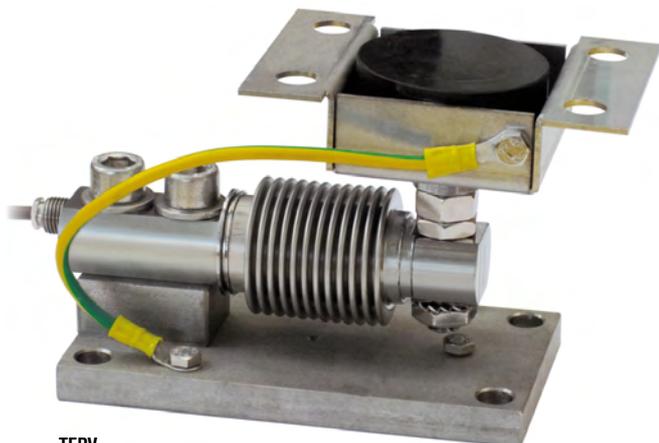

TFPV
TFPV2000

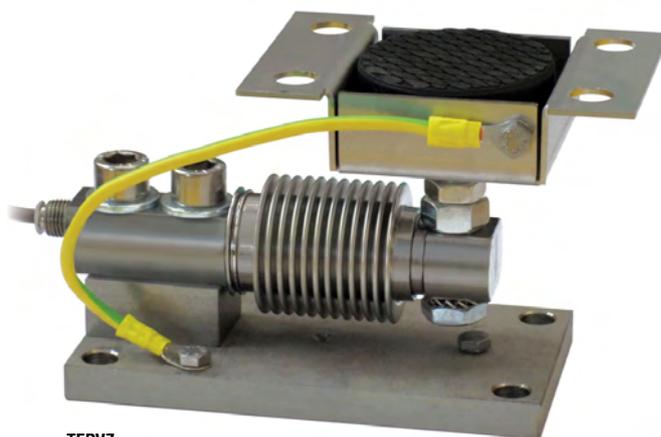

TFPVZ

MAX STATIC LOAD	kg	FOR LOAD CELLS	NET WEIGHT (kg)	CODE
500		FCAL - FCAX	2	TFPV
500		FCAL - FCAX	2	TFPVZ
1500		FCAX	2	TFPV2000


Load cell not included.

DESCRIPTION


- Adjustable upper plate in AISI 304 stainless steel (PPV) or galvanized steel (PPVZ).
- Lower plate and block in AISI 304 stainless steel.
- Constraint against lateral forces and anti-tilt by AISI 304 stainless steel (TFPV, TFPV2000) or galvanized steel (TFPVZ) self-centring joint foot.
- Compensation for any misalignments of the support plates of the structure.
- Partial height adjustment.
- Locking screw to avoid damage during transport and installation.

DIMENSIONS AND TECHNICAL SPECIFICATIONS


- During the transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts.

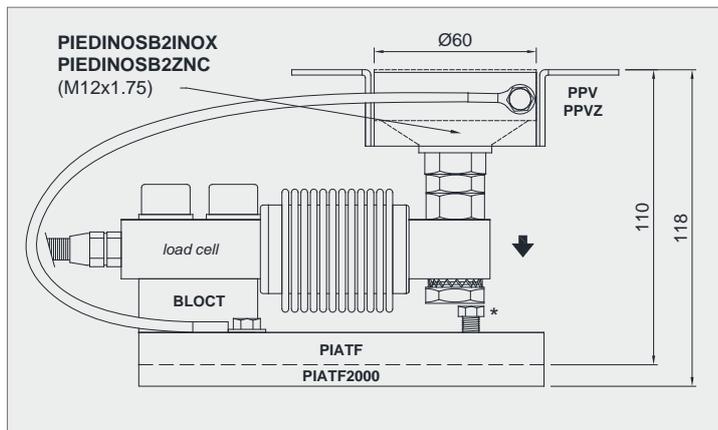


PIATF

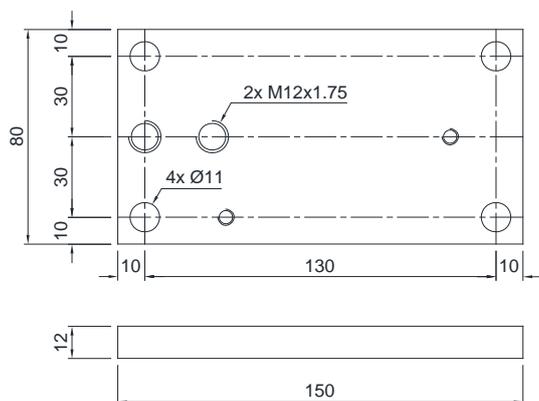


PIATF2000

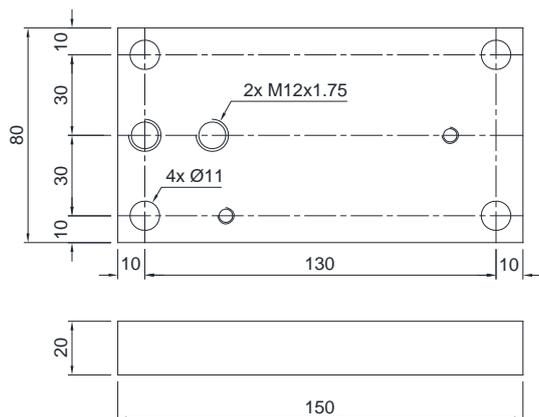


BLOCT




PPV
PPVZ

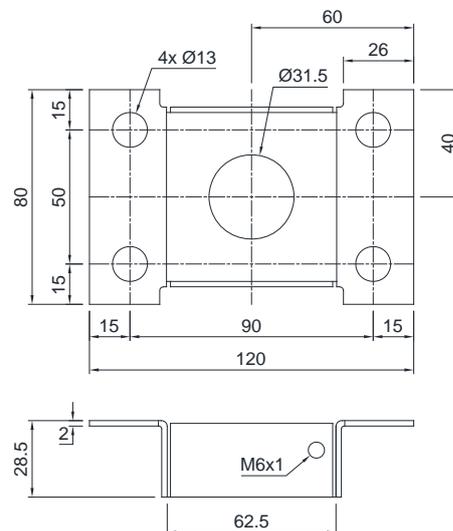


PIEDINOSB2ZNC
M12x1.75



PIEDINOSB2INOX
M12x1.75



FIXING TO THE WEIGHED STRUCTURE

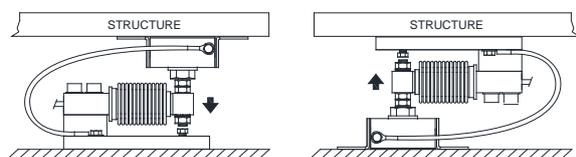

POSSIBLE UPPER PLATE POSITIONS

